IN CASE THE NEED FOR SERVICING ARISES.

If any problem occurs with your products, do not hestitate to call your service agent.
Name, address, telephone number is required.

SPECIFICATIONS

POWER CONSUMPTION	330W	
DIMENSIONS(mm)	W540 x D560 x H860	
WEIGHT	31 kg	
STANDARD WATER LEVEL	HIGH	56 *l*
	MED	49 *l*
	LOW	41 *l*
	EXTRA LOW	34 *l*
WATER PRESSURE	0.05~0.78 MPa (0.5 ~ 8.0 kg · f/cm^2)	
WASHING TYPE	Stirring Type	

CODE NO. : DC68-01565A

WASHING MACHINE

User's Manual

GSW850P
GSW865SP

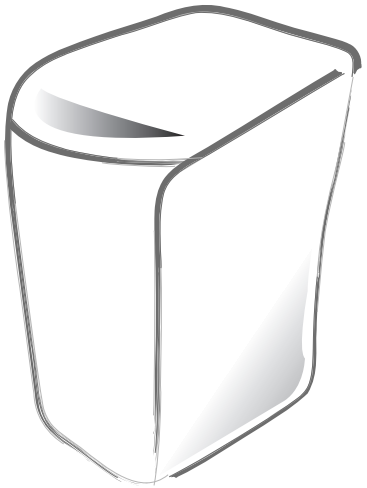

Before operating the unit, please read this manual thoroughly, and retain for future reference.

FEATURES	**1**
SAFETY INSTRUCTIONS	**2**
DESCRIPTION OF PARTS	**3**
CONTROL PANEL	**4**
WASHING PROCEDURE	**5**
Fuzzy course	5
Blanket course	5
Speedy course	5
Wool course	5
Delay start course	5
MANUAL FUNCTIONS	**6**
INSTALLATION & MAINTENANCE	**7**
Environment	7
Levelling	7
Connecting the water supply hose	7
Assembling the sound absorbing panel	8
Connecting the drain hose	8
How to add the fabric softener	8
How to put the detergent in	8
Cleaning the filter net.	9
How to clean the filter	9
TROUBLESHOOTING	**10**
SPECIFICATIONS	

FEATURES

FUZZY CONTROL
- Fuzzy control operates with best washing course by sensing the washload like artificial intelligence.

PULSATOR
- The Pulsator helps water and detergent to go through fabrics efficiently while providing both the powerful water action to clean larger and heavier clothes and the gentle water action to clean all delicates with less wear and tear on clothes.

WATERFALL FLOW
- The Waterfall Flow injected from under the pulsator cascades with full force back into the tub, pushing down any clothes that float right under the water surface. It is this Waterfall Flow that enables this washing machine to effectively wash large and heavy items, such as bluejeans and blankets.

MAGIC FILTER
- This unique Magic Filter ensures that the lint inside the tub is captured for top quality filtering results to deliver consistently effective cleaning results.

SOFTENER DISPENSER
- The Softener Dispenser releases the fabric softener at the appropriate time when the last rinsing proceeds.

SAFETY INSTRUCTIONS

Please note that the following precautions for safety intend to prevent unpredictable danger and damage by helping the proper use in safety.

Please make sure that the washing water should not exceed 50˚C.
● Plastic parts may be deformed or damaged, and an electric shock or a fire may take place.

WARNING

There might be serious injury or fatal accident when you violate this instruction.

If the power supply cord or plug is damaged or loosened, do not use.
• An electric shock or a fire may take place.

Do not pull the cord off or touch it with moist hands.
• An electric shock or a fire may take place.

Do not bend the power supply cord by force or press it with heavy things.
• An electric shock or a fire may take place.

Do not install the washer nearby electric implement or don't put a candle light or cigarette light on the washer.
• A fire may take place.

Do not disassemble, repair or remodel it recklessly.
• When you need to repair it, please call service agent. An electric shock or a fire may take place.

During operation, do not put your hands or metal materials under the washer.
• You may be hurt by spinning board beneath the washer.

Stay away from the washer when the bottom of the washer sinks into the water.
• There might be an electric shock. Please wait until the water drains out completely.

Do not put laundry stained with gasoline, benzene, or alcohol in the washer, and keep the materials away from the washer.
• An explosion or a fire may take place.

During spinning, don't put your hand in the spinning tub.
• It may hurt your hands. If it does not stop within 15 seconds after you open the lid, call service agent immediately.

CAUTIONS

There might be a slight injury or damage when you violate this instruction.

Don't install it in the area with moisture or outdoor where it has rain or snow
• An electric shock or a fire may take place.

Please unplug the power supply cord when you do not use it.
• An electric shock or a fire may take place.

If there is dust or water on the power supply plug and its connected part, please remove it completely.
• An electric shock or a fire may take place.

Do not make your kids look into the inside of the washer.
• If your kid falls into the washer, his life could be in danger.

Ventilate immediately without touching the power plug if gas is leaking.
• An electric shock or a fire may take place if it catches flame.

If the washer makes strange noise, smell or smoke, unplug it promptly and call service agent.
• An electric shock or a fire may take place.

When cleaning, don't spray water to the parts of the washer directly.
• It may make its life span shorten.
Also an electric shock or fire may take place

Don't use several appliances together with an outlet.
• A fire may take place due to unusual heat.

Don't press the button with an awl or pin.
• An electric shock or a fire may take place.

DESCRIPTION OF PARTS

The User's Manual is for common use.
Make use of the User's Manual depending upon your washing machine model.

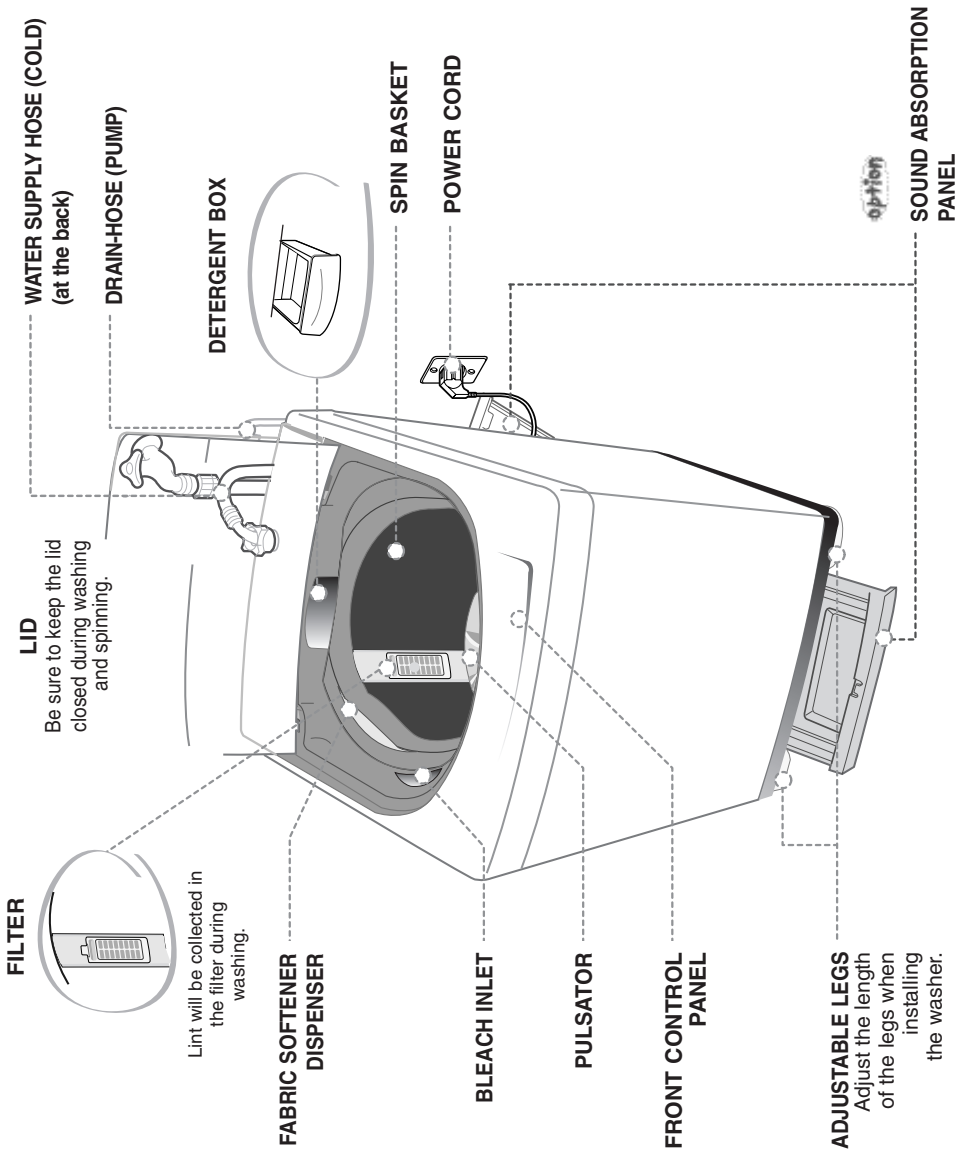

CONTROL PANEL

For more details, see control panel of your washing machine.

➢ POWER BUTTON

Press this button once to operate.
Press once again to turn the power off.

➢ START/HOLD BUTTON

Use to pause and restart the operation.
To change the washing procedure during operation, press this button to stop, and once again to restart after changing the procedure.

➢ DELAY START BUTTON

Press this button when delay start washing is needed.

➢ COURSE SELECT BUTTON

With every press of this button, the washing course changes;
FUZZY ➔ BLANKET➔ SPEEDY ➔ WOOL ➔ FUZZY

➢ FUNCTION SELECT BUTTON

With every press of this button, the function changes; SOAK,WASH,RINSE,SPIN ➔ WASH ➔ RINSE ➔ SPIN ➔ WASH & RINSE ➔ RINSE & SPIN ➔ WASH,RINSE,SPIN

➢ WATER LEVEL SELECT BUTTON

According to the washload, select the water level ;
MED ➔ HIGH ➔ EXTRA LOW ➔ LOW

➢ REMAINING TIME INDICATOR LIGHT

The indicator light shows the remaining time (in minutes) of each wash cycle.
At the end of the cycle,the power automatically switches off.

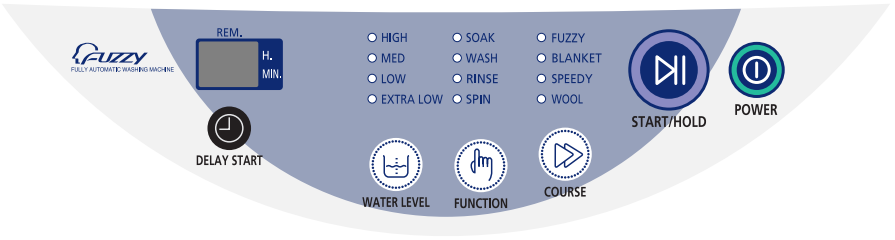

CONTROL PANEL

WASHING PROCEDURE

Before starting washing, check the following;
Connect the water supply hose to the water tap. Leave a tap open. Plug the power cord in.

Put the laundry into the washer and add detergent, too.
Be careful not to overload. Use right detergent for the fabrics you are washing.

➢ FUZZY COURSE

Selects the best washing course automatically.

1. Press the POWER Button to"ON".
2. Press the START/HOLD button.
   Water level is selected automatically.
   Washing,rinsing, and spinning follow.
   If you want to pause, press the START/HOLD button again.You can change the course when paused.
3. Close the lid.

➢ BLANKET COURSE

1. Press the power button to "ON".
2. Press the course select button once.
3. Press the START/HOLD button
   Water level is selected automatically.
   Washing, rinsing, and spinning follow.
   If you want to pause, press the START/HOLD button again.You can change the course when paused.
4. Close the lid.

➢ SPEEDY COURSE

Because washing is speedy, it is good for light or less stained laundry.

1. Press the power button to "ON".
2. Press the course select button twice.
3. Press the START/HOLD button
   Water level is selected automatically.
   Washing, rinsing, and spinning follow.
   If you want to pause, press the START/HOLD button again.You can change the course when paused.
4. Close the lid.

➢ WOOL COURSE

1. Press the power button to "ON".
2. Press the course select three times.
3. Press the START/HOLD button.
   Washing,rinsing, and spinning follow.
   If you want to pause, press the START/HOLD button again.You can change the course when paused.
4. Close the lid.

CAUTION . . .

- *Refer to the tag attached on the clothes for washing information.*
- *Fasten buttons and turn inside out before washing.*
- *Use the detergent indicated in the laundry.*
- *When the degree of dirt is extreme, soak the laundry in warm water for about 10 minutes before pressing the WOOL course button in order to enhance washing efficiency.*

➢ DELAY START COURSE

Select this course when you have to go out or do something else.

1. Press the power button to "ON".
2. Press the DELAY START button once.
   You may change the delay start time with use the DEALY START button.
   (from 3 hours to 18 hours)
3. Press the START/HOLD button and put the proper amount of detergent into tub.
4. Close the lid.
   The washing finishes by the time you reserved.

MANUAL FUNCTIONS

once

SOAK FUNCTION (Including WASH, RINSE, SPIN)
Press the POWER button.
Select the course (Press the course button).
➔ FUZZY, BLANKET, SPEED, WOOL.
Press the FUNCTION SELECT button once.
Press the START/HOLD button once.
Water level is selected automatically.
Washing,rinsing, and spinning follow.

twice

WASH ONLY
Press the POWER button.
Press the FUNCTION SELECT button twice.
Press the START/HOLD button once.
Washing goes on for 18 minutes.
When the FUNCTION button is pressed during washing, the wash time can be changed to between 3 and 24 minutes in duration.

three times

RINSE ONLY
Press the FUNCTION button three times.
Press the START/HOLD button once.
Rinsing goes on for 15 minutes.
When the FUNCTION button is pressed during rinsing, the rinse times can be changed to between 1 to 5 times in duration.

four times

SPIN ONLY
Press the FUNCTION button four times.
Press the START/HOLD button once.
Spin drying goes on for 11 minutes.
When the FUNCTION button is pressed during spinning, the spin time can be changed to from 5 to 11 minutes.

five times

WASH AND RINSE
Press the FUNCTION button five times.
Press the START/HOLD button once.
Washing and rinsing go on for 38 minutes.
When the FUNCTION button is pressed during working, the rinse times can be changed to between 1 to 5 times in duration.

six times

RINSE AND SPIN
Press the FUNCTION button six times.
Press the START/HOLD button once.
Rinsing and spin drying follow.
When the FUNCTION button is pressed during working, the rinse times can be changed to between 1 and 5 times in duration.

GSW850P_01565A-gb(0322) 2002/3/22 12:31 PM Page 9

INSTALLATION & MAINTENANCE

The User's Manual is for common use.
Make use of the User's Manual depending upon your washing machine model.

ENVIRONMENT

Leave some space
Maintain at least 10cm between the washer and the wall.

Place the washer on a sturdy flat surface.
If the washer is placed on an uneven or weak surface, noise or vibration occurs. (Allowable is 1˚)

Adjust the legs for even placement.

Never install the washer near water.
Do not place the washer in steamy rooms or where the washer is directly exposed to rain. Moisture may destroy the electrical insulation causing an electrical shock hazard.

Avoid direct sunlight or heaters.
As plastic and electrical components are affected by direct heat,never place the washer near furnaces, boilers, etc. Do not place under direct sunlight.

➢ LEVELLING

- If the washer is not leveled with the ground, it makes the machine tremble more or be out of order. So, make sure that the washer is leveled properly.

SEE IF THE MACHINE IS PLACED LEVEL BY CHECKING THE POSITION OF THE WASHING TUB.

- Open the lid of the machine, pour water into the tub up to the level just below the pulsator, and adjust the legs so that the pulsator is positioned at the center of the water as shown in the figure.
- Place the machine more than 10cm away from the wall.
- Adjust the legs on feet for levelling .



➢ CONNECTING THE WATER SUPPLY HOSE

1. If the water tap is a screw type,assemble a water supply hose that fits to the tap as shown.



2. Connect the other end of the water supply hose to the inlet water valve at the back of the washer.
   Screw the hose clockwise all the way in.



NOTICE *After completing connection, if water leaks from the hose, then repeat the same steps.*

➢ ASSEMBLING THE RAT PROTECTION PANEL option

Tilt the washer a little and lift up the panel until it clicks, finally fix the panel with screw to the base as shown in the figure.

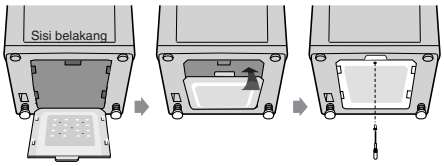

1. Insert the sound absorbing panel to the assembling hole on back side to the end.

2. If you have difficulty inserting the panel lift up the washer a little and insert it



➢ CONNECTING THE DRAIN HOSE

Take out the cap-hose and connect the outlet-hose.	Be sure to join tightly the drain hose into the drain-outlet on the back of the machine.	Install the drain hose in the position of about 90~100cm above the ground.
		

➢ HOW TO ADD THE FABRIC SOFTENER

- When a proper amount (one time does) of fabric softener is stored in the softener inlet, it is automatically put in at the last rinsing cycle.
- Do not use detergent, bleach or starch into the Softener Inlet.
- Using too much softener may produce unsatisfactory results.
- Do not open the lid during the Spin Dry cycle. If added too early, its effectiveness will decrease.
- Do not leave the softener into the Softener Dispenser for a long time. Because softner became stiff.



➢ HOW TO PUT THE DETERGENT IN

1. Open the detergent box by pulling in the direction of the arrow as shown in the figure and then put the powder detergent in the detergent box.

2. Put in one-time amount of detergent evenly so the detergent may not brim over the box.

Detergent Device



➢ **CLEANING THE FILTER NET** Clean the filter net often to keep the washer clean.



1. Push the upper part of the filter and pull in.



2. Open the cover as shown in the figure.

3. Clean the filter.

4. Close the cover and insert the lower part of the filter in the basket first and then push the filter with "click" sound .

➢ **HOW TO CLEAN THE FILTER**

1. Place a rag under the washer filter not to wet the floor.
2. Rotate the filter counterclockwise and pull out the filter.
3. Remove dirts and rotate the filter clockwise until it locks in position.



TROUBLESHOOTING

➢ Washing machine won't work

Is the water tap opened?
Is the washer plugged in?
Is the power cut off?
Is there enough water?

➢ Water is not supplied



Is the water tap opened?
Is the water cut off?
Is the water supply hose or hose connection clogged?
Is the water tap frozen?
If water is not supplied in 1 hour, a buzzer will sound, and the remaining time indicator will show "4E".

➢ Water dose not drain



Is the drain hose are 100cm above the ground?
Is the drain hose frozen?
Is the drain hose clogged?
If the water dose not drain in 15 minutes, a buzzer will sound,and the remaining time indicator will show "5E".

➢ Spinning does not work



Is the laundry spread out evenly in the washer?
Is the washer set on a sturdy flat surface?

➢ Water is overflowed

Restart after spinning.
If the error sign still indicates, call agency.